


# Pro-RF Al 21M

02-308

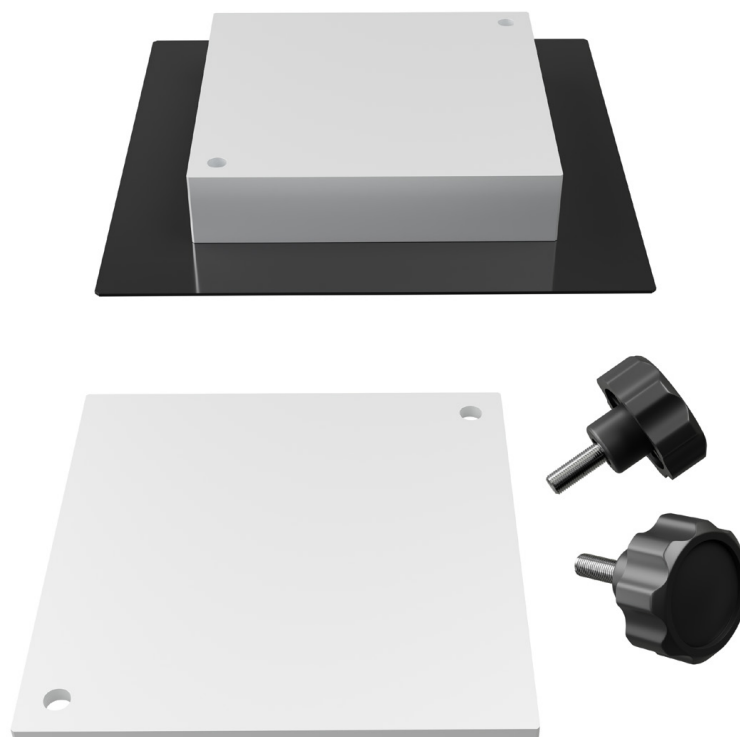

**A 2-in-1 solution** that allows to get **two attenuation thicknesses with one device:**  
**21 mm or 25mm.** Includes insertion frame for mounting near the X-Ray tube.

## Technical data (can be modified to customer specifications):

- filter dimensions: 120 x 120 x 21 mm
- additional 4 mm thick aluminium filter
- mounting frame
- made of the purest aluminium
- two mounting screws included
- optional 1 mm thick copper filter (that can be attached to the aluminium)  
for tests at and above 100 kV (Pro-RF Cu 1) (02-304)
- other sizes of filters upon request

## Product features:

- complies with:
  - IEC 61223-3-1
- CE certified
- the Manual provides detailed guidelines for carrying out each test, results assessment and registration

